

Comparison of PWR – burnup calculations with SCALE 5.0/TRITON other burnup codes and experimental results

Ph.Oberle, C.H.M.Broeders, R.Dagan
Forschungszentrum Karlsruhe, Institut for Reactor Safety
Hermann-von-Helmholtz-Platz-1, 76344 Eggenstein-Leopoldshafen, Germany
oberle@irs.fzk.de

Abstract

The increasing tendency towards fuel lifetime extension in thermal nuclear reactors motivated validation work for available evaluation tools for nuclear fuel burnup calculations. In this study two deterministic codes with different transport solvers and one Monte Carlo method are investigated.

The code system KAPROS/KARBUS uses the classical deterministic First Collision Probability method utilizing a cylindrized Wigner-Seitz cell. In the SCALE5.0/TRITON/NEWT code the Extended Step Characteristic method is applied. In a first step the two deterministic codes are compared with experimental results from the KWO-Isotope Correlation Experiment up to 30 MWD/kg HM burnup, published in 1981. Two pin cell calculations are analyzed by comparison of calculated and experimental results for important heavy isotope vectors. The results are very satisfactory.

Subsequently, further validation at higher burnup (< 80 MWD/kg HM) is provided by comparison of the two deterministic codes and the Monte Carlo based burnup code MONTEBURNS for PWR UO₂ fuel assembly calculations.

Possible reasons for differences in the results are analyzed and discussed. Especially the influence of cross section data and processing is presented.

Keywords: SCALE5, TRITON, KAPROS, MONTEBURNS, KWO-ICE, burnup

1. Introduction

One of the common ways to generate relevant data for fuel unit cells is based on one dimensional cylindrized Wigner-Seitz unit cells while preserving the unit cell volume of the original square or hexagonal array. The KAPROS system [1] uses this classical approach utilizing the collision probability method.

Another more accurate way is to represent the geometry of the problem with a flexible cell structure to give a better approximation of both rectangular and curved geometries inside the unit cell. Such a geometric solution was established in the transport program NEWT which is part of SCALE 5.0 [2]. NEWT uses the Extended Step Characteristic Method [3] in which the neutron probability transfer is constrained to characteristic lines.

The first step in this study compares these two deterministic methods with experimental results from the KWO-isotope correlation experiment [7] by pin cell burnup calculations. The results are evaluated by comparison of corresponding important heavy isotope vectors.

Pursuing the analysis, burnup calculations with KAPROS, SCALE5/TRITON and the Monte Carlo code MONTEBURNS are compared for an 18x18-24 PWR UO₂ assembly [5], with 4 w/o U-235 enrichment and 24 water holes in the assembly. In this case KAPROS uses the two dimensional transport solver TWODANT [9] in combination with homogenized unit cell cross

sections, while the SCALE5/TRITON/NEWT method stays the same as in the pin cell calculation. The results are examined for k_{inf} and important heavy isotope vectors.

2. Short description of the transport and burnup calculation methods in NEWT, KAPROS and MONTEBURNS

Conventional discrete ordinate codes can only handle regular geometries like (R, Z), (X, Y), (X, Y, Z), (R, θ , Z). NEWT which applies the Extended Step Characteristic method [3] can perform a completely arbitrary problem grid by using a polygonal grid structure instead of an orthogonal grid structure. The only condition is that the cells are restricted to non re-entrant polygonal shapes. The number of these polygons is not limited.

A classic discrete ordinate method is used in KAPROS/KARBUS. KARBUS applies the First Collision Probability (FCP) method as realized in WIMS [4]. The problem geometry in the FCP method is represented by a structured grid which only provides a single geometrical shape of grid meshes. In the Wigner-Seitz cell calculation in KARBUS the appropriated geometrical form of the meshes to represent the geometrical problem are rings. The advantage of the FCP method applied in KARBUS in contrary to the ESC method applied in NEWT is that in the FCP method a neutron can move from each point to each point of the geometric problem while in the ESC method a neutron can only move along characteristic lines.

In Figure 1 the pin cells of both deterministic codes are shown as applied in the experiment recalculation. In the KAPROS/KARBUS model the pin cell is divided into 16 fuel zones, 3 clad zones and 4 moderator zones to a total of 23 cylindrical meshes (not all meshes are indicated in the KAPROS/KARBUS pin cell in figure 1).

In SCALE5.0/TRITON/NEWT the pin cell is divided into 9 zones, 8 consisting of 3 polygonal meshes each (one mesh for each material) and one zone consisting of one mesh (the middle fuel zone) to a total of 25 meshes.

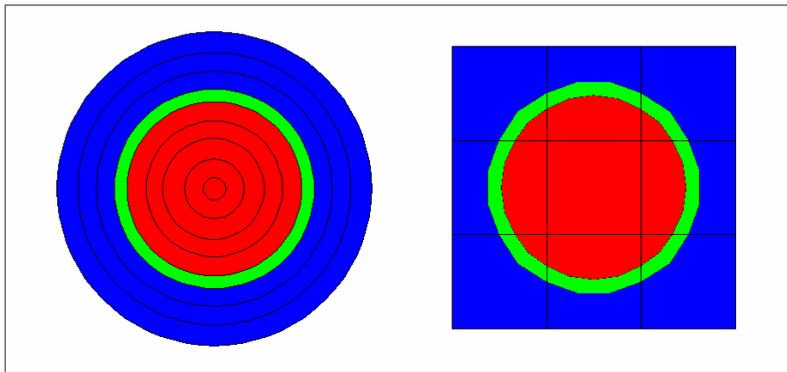


Figure 1: Basic pin cell meshes used in KARBUS (left) and NEWT (right)

The radial boundary conditions were specified as reflective, while the length of the pin was infinite, so the problem can be seen as infinite in radial and axial direction. Both deterministic calculations have been performed with S_n order of 8 and a convergence criterion of 10^{-5} for k_{inf} . The cross section libraries used are ENDF/B 5 (44 groups) in the SCALE 5.0/TRITON and ENDF/B 6.5 (69 groups) in the KAPROS/KARBUS calculation.

Both codes KAPROS and TRITON are using burnup modules which are originally based on ORIGEN from Oak Ridge National Laboratory, USA. The module BURNUP [1] which is used in

KAPROS is based on KORIGEN [10] which is derived from ORIGEN. In TRITON [2] the ORIGEN-S code is provided which is a further development from ORIGEN too.

3. The KWO - Isotope Correlation Experiment and the corresponding pin cell calculations

The pin cell configurations have been taken from the final report of the isotope correlation experiment at the nuclear power plant of Obrigheim [7]. The material composition in the fuel is UO_2 with 3,1 w/o enrichment of U-235. The clad consist of Zircaloy-4. The boron concentration in the moderator (water) changes during burnup as well as there are several reactor down times included in the experiment. Figure 2 shows the boron density history. Table 1 tabulates the power time steps. The maximum fuel rod power is $P=219,6$ W/cm. The volume ratio of moderator to fuel is $V_m/V_f = 1,494$.

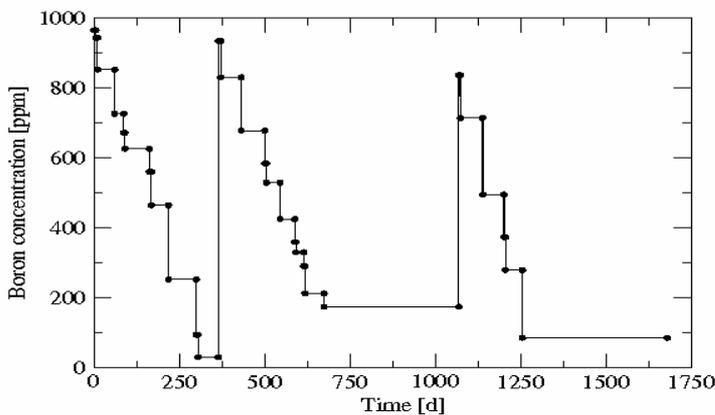


Figure 2: Boron concentration of KWO - ICE

Time [d]	Power [%]
5,8	100
1	0
79,6	100
2	0
33,5	100
41,5	0
131,5	100
5,8	0
36,9	100
28	0
126,9	100
9,2	0
84,7	100
3,5	0
23	100
3	0
60	100
13,8	87
380	0
246,7	100

Table 1: Power time steps of KWO - ICE

Figures 3 to 5 show very satisfactory agreement between the calculated and the measured isotopic distributions. Figure 3 indicates that both codes overestimate the U-238 consumption. Figure 4 shows a slightly higher burning of U-235 in both codes, compared to the experimental results. Figure 4 and 5 presents a little higher inventory of Pu-239 and Pu-240 in the codes than in the experiment. The deviations of the Pu-241 in figure 5 results are hardly visible but a very small overestimation of the codes is observable. It is very difficult to conclude reasons for these very small deviations because the plutonium isotope vectors in this study are always influenced by production and consumption. These two effects can compensate each other like it seems to be the case for Pu-241 in figure 5 which has less deviations than Pu-240.

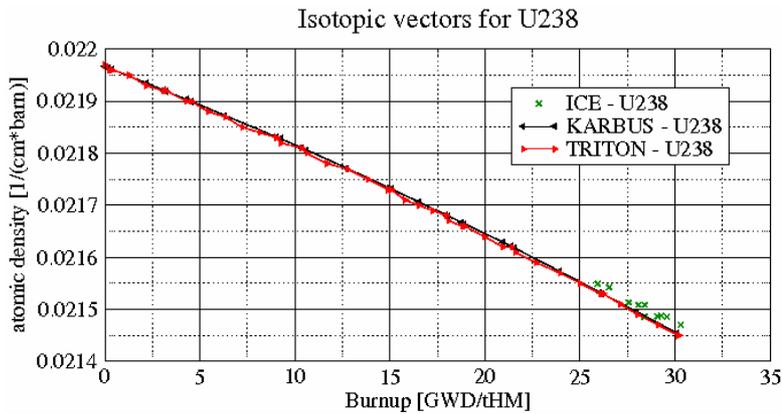


Figure 3: Uranium 238 inventory of the KAPROS/KARBUS and SCALE5/TRITON burnup calculations compared with the experimental results

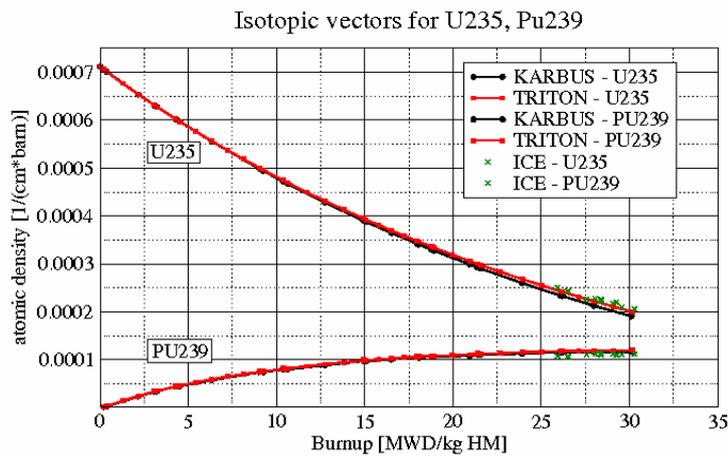


Figure 4: Uranium 235 and Plutonium 239 inventory for the KAPROS/KARBUS and SCALE5/TRITON burnup calculations compared with the experimental results

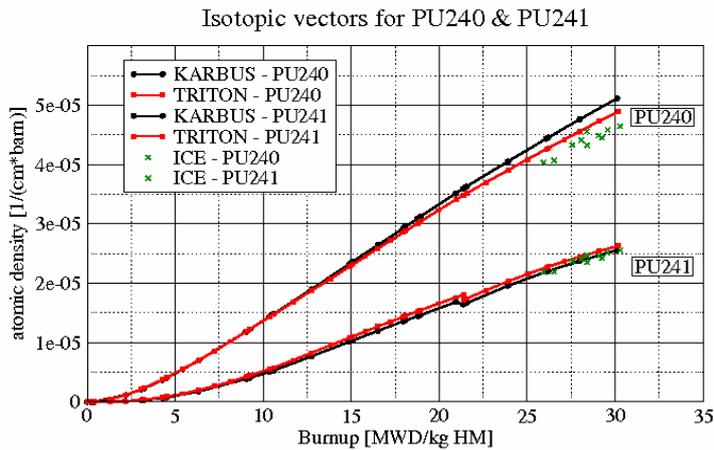


Figure 5: Plutonium 240 and Plutonium 241 inventory for the KAPROS/KARBUS and SCALE5/TRITON burnup calculations compared with the experimental results

4. Further validation with PWR assembly calculations

For further validation KAPROS and SCALE5/TRITON are compared by PWR assembly burnup calculations. Additionally, the Monte Carlo based code MONTEBURNS [6] is applied. MONTEBURNS calculates burnup with ORIGEN 2.1, while the transport calculations are performed by the Monte Carlo code MCNP4C2.

The specifications for the PWR assembly calculations are taken from reference [5]. The 18x18-24 PWR assembly consists of 300 square lattice fuel rods and 24 water holes. Figure 6 shows the assembly geometry. Due to symmetry only one quarter of the assembly was calculated. The volume ratio of moderator to fuel in the fuel rods is $V_m/V_f = 1,564$. The material composition in the fuel is UO_2 with 4 w/o enrichment of U-235. The clad consists of Zircaloy-4. The boron concentration in the water stays constant at 500 ppm over burnup. The boundary conditions are reflective, so the system is infinite in radial direction.

The modelling of the assembly problem was done by rod wise homogenization in KAPROS/KARBUS while the two dimensional transport calculations for KAPROS were done by TWODANT, which is part of DANTSYS 3.0 [9]. The SCALE5/TRITON transport calculation was done by the two dimensional transport module NEWT using 3299 calculation cells in total. The deterministic calculations were done with a S_n order of 6 and convergence criteria of 10^{-5} . The Monte Carlo calculations in MONTEBURNS have been performed with a standard deviation of 10^{-3} .

The used libraries are the 44 groups library, based on ENDF/B 5 in the SCALE5/TRITON and the 69 groups library based on ENDF/B 6.5 in the KAPROS/KARBUS/TWODANT calculation. In MONTEBURNS a mixture of ENDF/B 5, 6 and 6.5 was used.

The calculation time of TRITON (ca. 10h, on a 3 GHZ, UNIX PC) was approximately quarter of the KAPROS time for the applied group numbers. The MONTEBURNS calculation time depends very strongly on the chosen standard deviation (in this study: 10^{-3} , calculation time ca. two weeks on the same computer). Therefore the calculation time was enlarged approximately by a factor of 35 compared to the TRITON calculation duration. Determination of the exact calculation time is difficult due to the different accuracy parameter (e.g. number of cells in NEWT) but it seems obvious that the characteristic method is faster than the classical approach of KAPROS. The Monte Carlo method has clearly much higher time consumption.

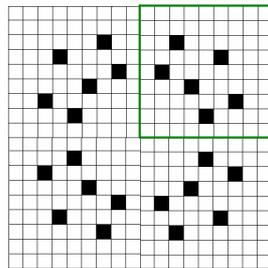


Figure 6: Assembly geometry, the calculated quarter is signed green

All assembly calculations have been performed up to a burnup of 80 MWD/kg HM.

Figure 7 shows the good agreement of the three codes for the burnup dependant reactivity but there are also small differences visible in the progress of the curves. Especially the Monte Carlo curve seems to fluctuate a little bit between the deterministic curves. A part of this fluctuation can be caused by the standard deviation (up to ± 20 % of the differences of k_{inf} in Figure 8). Reasons

for these deviations may be the different treatment of the fission product inventory, resonance shielding, data processing, scattering and the assumed energy per fission. The two deterministic results show that the KAPROS curve has a slightly higher reactivity loss at the beginning of burnup but then tends to a flatter progression than the TRITON curve does, crossing it at ca. 25 MWD/kg HM. The consumption of U-235 and U-238 is a little bit smaller in KAPROS than in TRITON. Therefore less U-238 seems to be converted to Pu-239 (as shown in Figure 10). The MONTEBURNS results in Figure 9 and 10 present higher deviations to the deterministic codes. An enlarged consumption of U-238 and U-235 and a higher Pu-239 inventory than in KAPROS and TRITON is shown.

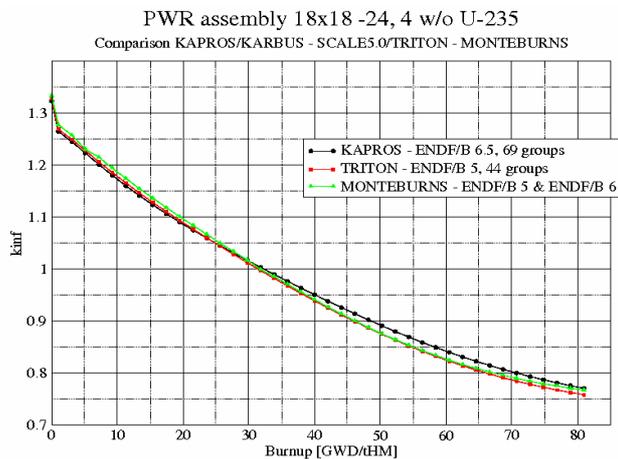


Figure 7: k_{inf} against burnup for the three assembly calculations

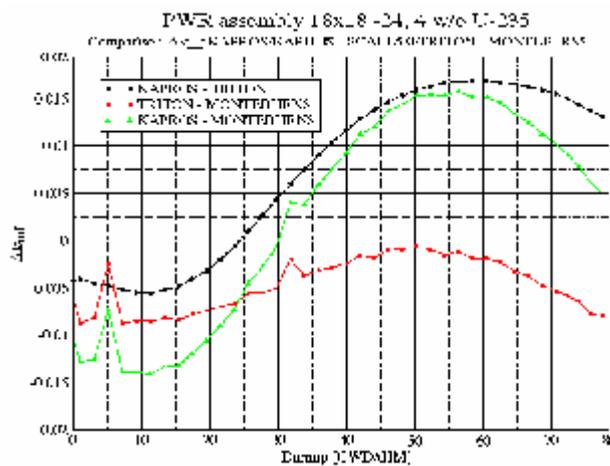


Figure 8: Δk_{inf} against burnup for the three assembly calculations

The maximum deviations of Δk_{inf} shown in Figure 8 at BOL are smaller than 0,8 % (KAPROS-MONTEBURNS) and smaller than 1,7 % (KAPROS-TRITON) at 80 MWD/kg HM.

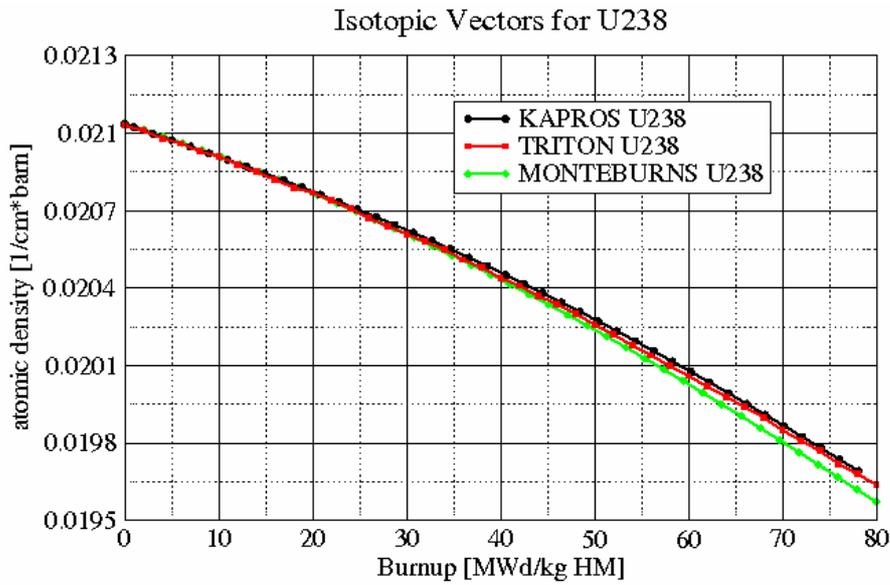


Figure 9: Isotopic Vectors for Uranium 238 for the three calculations

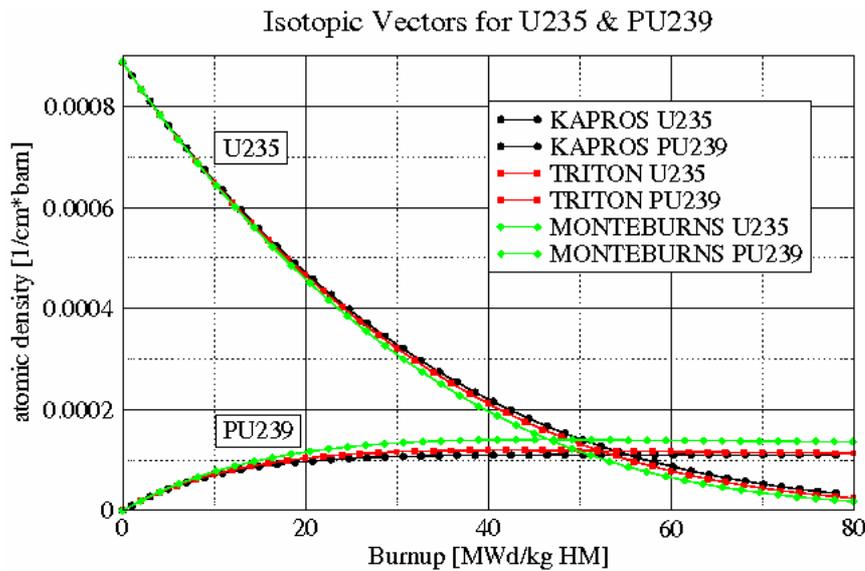


Figure 10: Isotopic Vectors for Uranium 235 and Plutonium 239 for the three calculations

5. Summary and outlook

The KAPROS and the SCALES5/TRITON system were both validated at pin cell level with experimental results. The recalculations of the KWO – Isotope Correlation Experiment show very satisfactory agreement of both deterministic codes with the experiment up to 30 MWD/kg HM.

The very small deviations show that the classical Wigner-Seitz cell in KAPROS/KARBUS and the Extended Step Characteristic method in SCALE5/TRITON/NEWT provide accurate results. Subassembly calculations have been performed for a PWR UO₂ assembly for further validation at higher burnup (up to 80 MWD/kg HM). The two deterministic codes, KAPROS/KARBUS developed at FZK, Karlsruhe, and TRITON/NEWT a new option in the SCALE 5.0 standard code for LWR licensing, and the Monte Carlo based code system MONTEBURNS have been compared. The differences in k_{inf} between KAPROS and MONTEBURNS grow from ca. 0,7% at BOL to a maximum of ca. 2% during burnup. Between SCALE5.0/TRITON and MONTEBURNS the differences amount ca. 0,5 % at BOL and 0,8% at EOL.

For further validation the different data bases and the differences in the data processing e.g. the treatment of the resonance shielding, of the fission spectra, scattering and of the energy releases will be considered in more detail. For this purpose additional Monte Carlo calculations with MCNPX [11] and MCB [12] will be included in these validation investigations.

6. References

- [1] C.H.M. Broeders, „Entwicklungsarbeiten für die neutronenphysikalische Auslegung von fortschrittlichen Druckwassereaktoren (FDWR) mit kompakten Dreiecksgittern in hexagonalen Brennelementen“, KFK 5072, 1992
- [2] “SCALE: A Modular Code System for Performing Standardized Computer Analyses for Licensing Evaluation”, ORNL/TM-2005/39, Version 5, Vols. I-III, April 2005
- [3] M.D. DeHart, R.E. Pevey, T.A. Parish, “An Extended Step Characteristic Method for Solving the Transport Equation in General Geometries”, Nuclear Science and Engineering, 118, 79-90, 1994
- [4] J.R. Askew, F.J. Fayers, P.B. Kemshell, “A General Description of the Lattice Code WIMS”, Journal of British Nuclear Energy Society, 5, 564 (1966)
- [5] D. Porsch, et al; „Spezifikationen eines DWR-Brennelementes, UO₂ (4 w/o U-235) 18x18 – 24, für Vergleichsrechnungen“, Framatome ANP GmbH Erlangen Juli, 2004
- [6] D.I. Poston, H.R. Trellue, “User’s Manuel, Version 2.0 for MONTEBURNS, Version 1.0“, LA-UR-99-4999, September 1999
- [7] L. Koch, S. Schoof, “The Isotope Correlation Experiment ICE”, ESARDA 2/81, EUR 7766 EN, KfK 3337, (1981)
- [8] Ph. Oberle, C.H.M. Broeders, R. Dagan, „Comparison of PWR – Pin Cell burnup calculations with SCALE 5.0/NEWT – KAPROS/KARBUS – MONTEBURNS“, Jahrestagung Kerntechnik 2006, Aachen, Germany
- [9] “DANTSYS 3.0: One-, Two-, and Three-Dimensional, Multigroup, Discrete-Ordinates Transport Code System”, Los Alamos National Laboratory, Los Alamos, New Mexico
- [10] U. Fischer, H.W. Wiese, “Verbesserte konsistente Berechnung des nuklearen Inventars abgebrannter DWR-Brennstoffe auf der Basis von Zell-Abbrand-Verfahren mit KORIGEN“, KfK 3014, 1983
- [11] J.S.Hendricks, G.W. MCKinney, H.R. Trellue et.al., “MCNPX-Version 2.6.B.“ (LA-UR-06-3248), June 2006
- [12] J. Cetnar, W. Gudowski, J. Wallenius, “MCB: A continuous energy Monte Carlo Burnup simulation code”, in “Actinide and Fission Product Partitioning and Transmutation”, EUR 18898 EN, OECD/NEA (1999) 523